


GRADE 1-T 600 Series

Deadbolts-Single & Double Cylinder I/C

- Adjustable door thickness 1 3/8"-1 3/4"
- 3 hour UL/cUL listed
- 1" stainless steel throw deadbolt
- ADA turn lever
- American National Standard ANSI A156.5-1992 Aux. Locks, Gr.1 with 1 CD core & strike
- Standard 2 3/4" backset bolt, 2 3/8" backset bolt upon request
- No exposed mounting screws (available)
- Free- turning, wrench-resistant, tapered cylinder ring

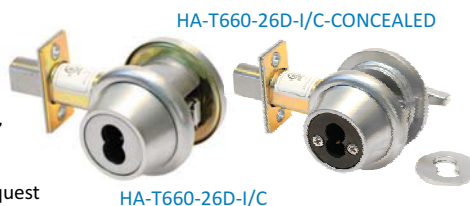

- 2 1/8" cross bore
- Solid extruded brass cylinder with brass shell
- Stainless steel for strength and corrosion resistance
- Simple installation; self-aligning and reversible
- Rose diameter 2 5/8"
- Compatible with all 6/7 pin SFIC
- Limited 1 year mechanical warranty

Part #	Description	Finish
HA-T660-26D-I/C	6/7pin SFIC, standard mounting,	satin chrome
HA-T662-26D-IC	6/7pin SFIC, double cylinder, standard mounting	satin chrome
HA-T660-26D-I/C-CONCEALED	6/7pin SFIC, concealed mounting	satin chrome
HA-T662-26D-I/C-CONCEALED	6/7pin SFIC, double cylinder, concealed mounting	satin chrome
HA-T6000-26D-BOLT-2 3/8	bolt only, 2 3/8" backset	satin chrome
HA-T6050-26D-BOLT-2 3/4	bolt only, 2 3/4" backset	satin chrome
HA-T12-100-26D	deadlatch only, 2 3/8" backset	satin chrome
HA-T12-103-26D	deadlatch only, 2 3/4" backset	satin chrome

HA-T6050-26D-BOLT



HA-T12-100-26D

GRADE 2-T 400 Series

Deadbolts-Single & Double Cylinder - optional I/C

- Adjustable door thickness 1 3/8" to 2 1/4"
- 3 hour UL/cUL listed
- 1" bolt throw
- Adjustable backset bolt, 2 3/8- 2 3/4"
- Fits 1 1/2" to 2 1/8" cross bore, 1" edge bore and 1" x 2 1/4" edge preparation
- Solid brass 5-pin cylinder (drilled for 6)



- Solid brass bolt with reinforced hardened steel roller
- Hardened steel insert (1 7/8" diameter)
- Solid steel door frame strike plate, reinforced with 3" screws to protect against kick in attacks
- Rose diameter 2 1/2"
- "SCI" or "WR5" keyways, keyed different
- Limited 1 year mechanical warranty

Part #	Description	Finish
HA-T460-SC-32D	single cylinder, adjustable backset	stainless steel
HA-T460-WR-32D	single cylinder, adjustable backset	stainless steel
HA-T460-32D-I/C	single cylinder, adjustable backset, 6/7pin SFIC	stainless steel
HA-T460-SC-US3	single cylinder, adjustable backset	polished brass
HA-T460-WR-US3	single cylinder, adjustable backset	polished brass
HA-T462-SC-32D	double cylinder, adjustable backset	stainless steel
HA-T462-WR-32D	double cylinder adjustable backset	stainless steel
HA-T462-SC-US3	double cylinder adjustable backset	polished brass
HA-T462-WR-US3	double cylinder adjustable backset	polished brass
HA-T462-I/C-32D	double cylinder adjustable backset, 6/7pin SFIC	stainless steel
HA-T4000-32D	bolt only 2 3/8"- 2 3/4"backset	stainless steel
HA-T4000-US3	bolt only 2 3/8"- 2 3/4" backset	polished brass
HA-T8000-32D	springlatch only, 2 3/4"backset	stainless steel
HA-T8000-US3	springlatch only, 2 3/4"backset	polished brass

HA-T8000-32D



HA-T4000-32D

HA-T4000-US3

*WR = 6 pin, keyed 5 WR5 keyway *SC = 6 pin, "C" keyway